

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 30A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	400V
Rate current(A)	32A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.62mm, Poles : N=02~12P
- 3.Operating temperature:-30℃~+120℃
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm							-	∩	□
TO	Over	Over	TO	Over	Over	Over	Over	Over	0.1/10		
6	6	10	10	30	60	100	150	150			
6	10	24	30	60	100	150	150	150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*			

5.RoHS Compliance

Ordering Information

JL5EDGVC- 762 XX G 0 1

Pitch

762=7.62PH

No.of pins

2P,3P,4P~12P

Housing

B=Black

G=Green

U=Blue

R=Red

W=White

Y=Yellow

□=Orange

E=Grey





Color

Packing


0=Pe bag

T=Tube

A=Tray

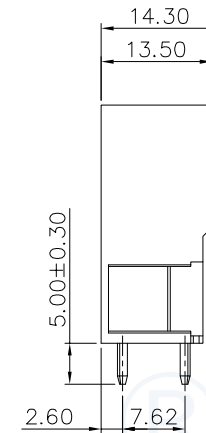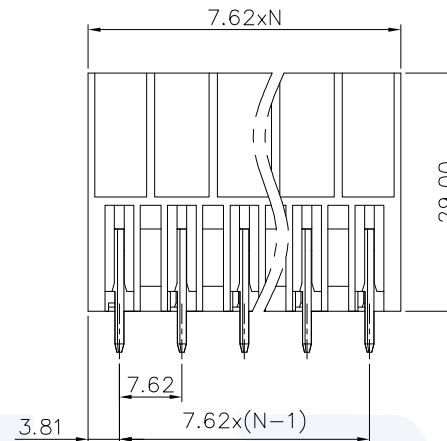

PCB LAYOUT

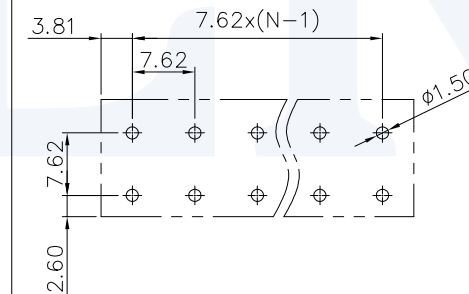

DRAW	SHUANGPING ZHENG	SCALE	FIT	JILN [®] 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	LICHAD LIU	SIZE	A4	PART NO.	JL5EDGVC-762XXG01
APPROVE	YONGLIANG GAO	SHEET	1/1	TITLE:	JL5EDGVC-7.62-XXP 插拔式公座/ 绿色
ITEM	NAME OF PART	MATERIAL	NOTES	PROJ.	

2	Pin header	Copper	Sn Plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES